MINI SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- Fault codes are automatically displayed for easy maintenance
- The foldable fence reduces the volume of the whole machine
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- Swivel chassis for easy maintenance
- The pedal extension platform can be quickly rolled out to the operating point



FEATURES

Safety Configuration

Automatic braking system
Emergency descent system
Charging protection system
Oil pipe explosion-proof system
Tilt protection system
Automatic pothole protection
Emergency stop button
Tamper-proof
Platform self-locking door
Foldable fence


Other Configuration

Full Self-propelled
Non-marking tire
4×2 drive
Extended platform
Horn& Buzzer
Standard transport forklift hole
Work schedule
Continuously variable speed


א.מ.ר ייבוא מלגזות בע"מ
A.M.R. Forlift Import Ltd
ירכא איזור תעשייה ת.ד. 530 מיקוד 249670
info@amr-ltd.co.il Tel:+972-00-0000000

DETAILED PARAMETERS OF MINI SCISSOR LIFT SERIES

Model	GTJZD04
Size	
Working Height	6m
A-Platform Height-Elevated	4m
B-Platform height-Stowed	0.95m
C-Platform Length	1.29m
D-Platform Width	0.7m
Platform Extension	0.6m
E-Overall Height (unfolded guardrail)	2.00m
Overall height (folded guardrail)	1.63m
F-Overall Length	1.48m
G-Overall Width	0.76m
H-Wheelbase	1.05m
I-Ground clearance (Stowed)	0.06m
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	100kg
Platform Capacity	240kg
Max. Number of Workers	2
Driving Speed (Strowed)	4.0km/h
Driving Speed (Raised)	0.5km/h
Turning radius (outside)	1.35m
Turning radius (inside)	0.3m
Lifting speed	4-6m/min
Gradeability	0.25
Max. Working Angle	2°/3°
Tire(drive wheel)	Φ230×80mm
Power	
Battery	2×12V/80ah
Charger	24V/15A
Weight	
Gross	890kg

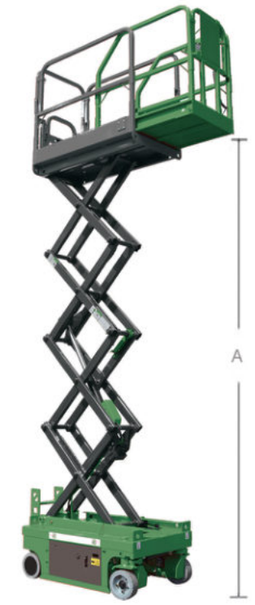





MINI SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- Fault codes are automatically displayed for easy maintenance
- The foldable fence reduces the volume of the whole machine
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- Swivel chassis for easy maintenance
- The pedal extension platform can be quickly rolled out to the operating point



FEATURES

Safety Configuration

Automatic braking system
Emergency descent system
Charging protection system
Oil pipe explosion-proof system
Tilt protection system
Automatic pothole protection
Emergency stop button
Tamper-proof
Platform self-locking door
Foldable fence


Other Configuration

Full Self-propelled
Non-marking tire
4×2 drive
Extended platform
Horn& Buzzer
Standard transport forklift hole
Work schedule
Continuously variable speed

א.מ.ר ייבוא מלגזות בע"מ
A.M.R. Forlift Import Ltd
ירכא איזור תעשייה ת.ד. 530 מיקוד 249670
info@amr-ltd.co.il Tel:+972-00-0000000

DETAILED PARAMETERS OF MINI SCISSOR LIFT SERIES

Model	QY0508DEM
Size	
Working Height	6.5m
A-Platform Height-Elevated	4.5m
B-Platform height-Stowed	0.99m
C-Platform Length	1.29m
D-Platform Width	0.7m
Platform Extension	0.6m
E-Overall Height (unfolded guardrail)	2.09m
Overall height (folded guardrail)	1.73m
F-Overall Length	1.39m
G-Overall Width	0.81m
H-Wheelbase	1.11m
I-Ground clearance (Stowed)	0.85m
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	100kg
Platform Capacity	230kg
Max. Number of Workers	3
Driving Speed (Strowed)	3.5km/h
Driving Speed (Raised)	0.5km/h
Turning radius (outside)	1.35m
Turning radius (inside)	0.3m
Lifting speed	4-6m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(drive wheel)	Φ255×80mm
Power	
Battery	2×12V/103ah
Charger	24V/15A
Weight	
Gross	1010kg

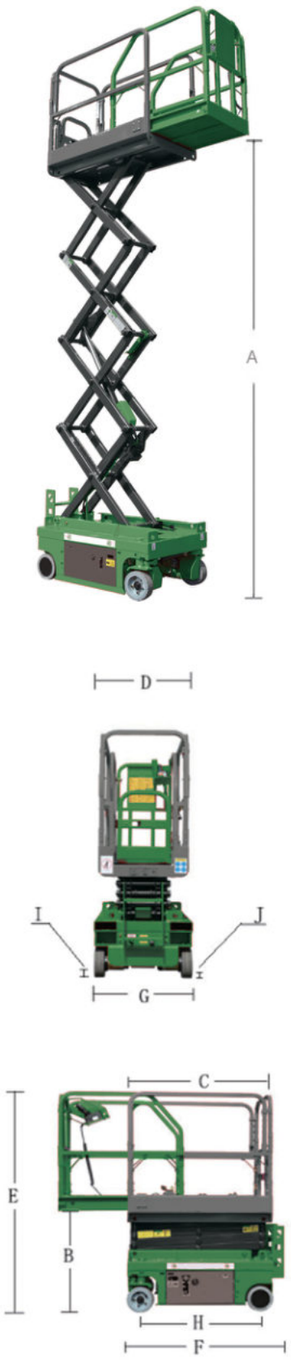


MINI SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- Fault codes are automatically displayed for easy maintenance
- The foldable fence reduces the volume of the whole machine
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- Swivel chassis for easy maintenance
- The pedal extension platform can be quickly rolled out to the operating point

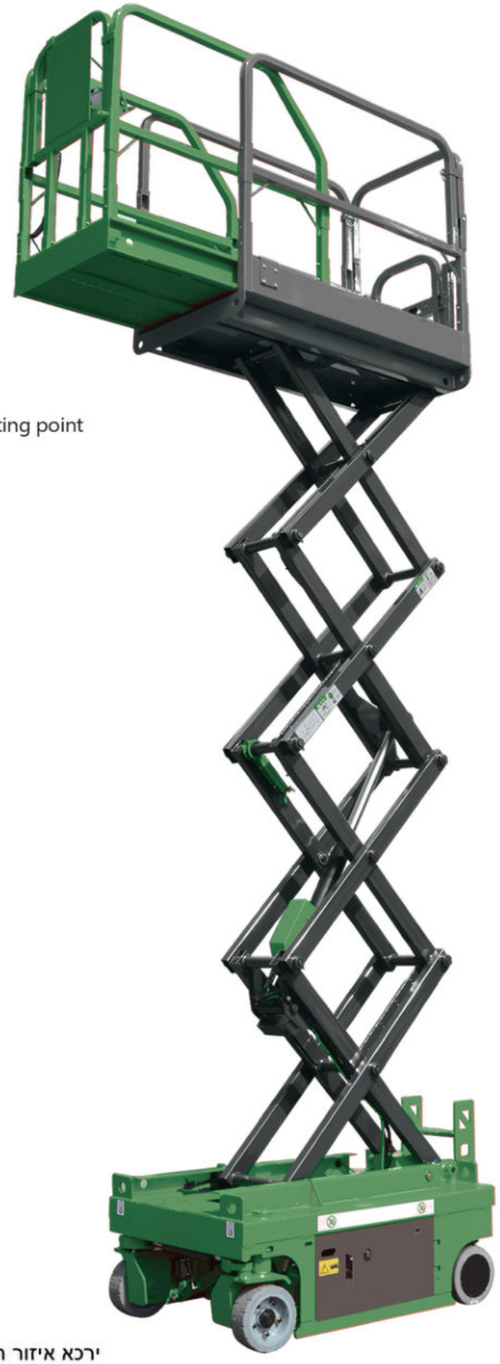

FEATURES

Safety Configuration

Automatic braking system
Emergency descent system
Charging protection system
Oil pipe explosion-proof system
Tilt protection system
Automatic pothole protection
Emergency stop button
Tamper-proof
Platform self-locking door
Foldable fence


Other Configuration

Full Self-propelled
Non-marking tire
4×2 drive
Extended platform
Horn& Buzzer
Standard transport forklift hole
Work schedule
Continuously variable speed


א.מ.ר ייבוא מלגזות בע"מ
A.M.R. Forlift Import Ltd
ירכא איזור תעשייה ת.ד. 530 מיקוד 249670
info@amr-ltd.co.il Tel:+972-00-0000000

DETAILED PARAMETERS OF MINI SCISSOR LIFT SERIES

Model	GTJZ0607HD
Size	
Working Height	7.8m
A-Platform Height-Elevated	5.8m
B-Platform height-Stowed	1.1m
C-Platform Length	1.67m
D-Platform Width	0.74m
Platform Extension	0.9m
E-Overall Height (unfolded quardrail)	2.21m
Overall height (folded guardrail)	1.85m
F-Overall Length	1.855m
G-Overall Width	0.79m
H-Wheelbase	1.36m
I-Ground clearance (Stowed)	0.083m
J-Ground Clearance (Raised)	0.016m
Performance	
Capacity of Extension	113kg
Platform Capacity	230kg
Max. Number of Workers	3
Driving Speed (Strowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning radius (outside)	1.64m
Turning radius (inside)	0.3m
Lifting speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(drive wheel)	Φ305×100mm
Power	
Battery	4×12V/80ah
Charger	24V/30A
Weight	
Gross	1620kg

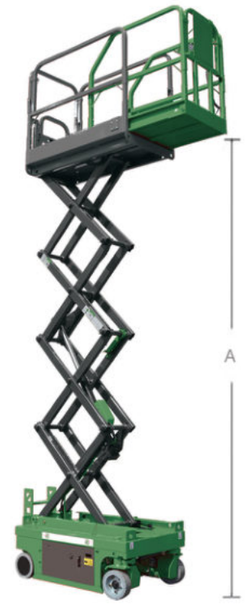





MINI SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- Fault codes are automatically displayed for easy maintenance
- The foldable fence reduces the volume of the whole machine
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- Swivel chassis for easy maintenance
- The pedal extension platform can be quickly rolled out to the operating point



FEATURES

Safety Configuration

Automatic braking system
Emergency descent system
Charging protection system
Oil pipe explosion-proof system
Tilt protection system
Automatic pothole protection
Emergency stop button
Tamper-proof
Platform self-locking door
Foldable fence


Other Configuration

Full Self-propelled
Non-marking tire
4×2 drive
Extended platform
Horn& Buzzer
Standard transport forklift hole
Work schedule
Continuously variable speed

א.מ.ר ייבוא מלגזות בע"מ
A.M.R. Forlift Import Ltd
ירכא איזור תעשייה ת.ד. 530 מיקוד 249670
info@amr-ltd.co.il Tel:+972-00-0000000

DETAILED PARAMETERS OF MINI SCISSOR LIFT SERIES

Model	GTJZ0608HD
Size	
Working Height	7.80m
A-Platform Height-Elevated	5.80m
B-Platform height-Stowed	1.1m
C-Platform Length	2.26
D-Platform Width	0.81m
Platform Extension	0.9m
E-Overall Height (unfolded quardrail)	2.2m
Overall height (folded guardrail)	1.73m
F-Overall Length	2.48m
G-Overall Width	0.84m
H-Wheelbase	1.89m
I-Ground clearance (Stowed)	0.1m
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	113kg
Platform Capacity	230kg
Max. Number of Workers	5
Driving Speed (Strowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning radius (outside)	3.1m
Turning radius (inside)	0.3m
Lifting speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(drive wheel)	Φ381×127mm
Power	
Battery	4×6V/200ah
Charger	24V/30A
Weight	
Gross	1880kg

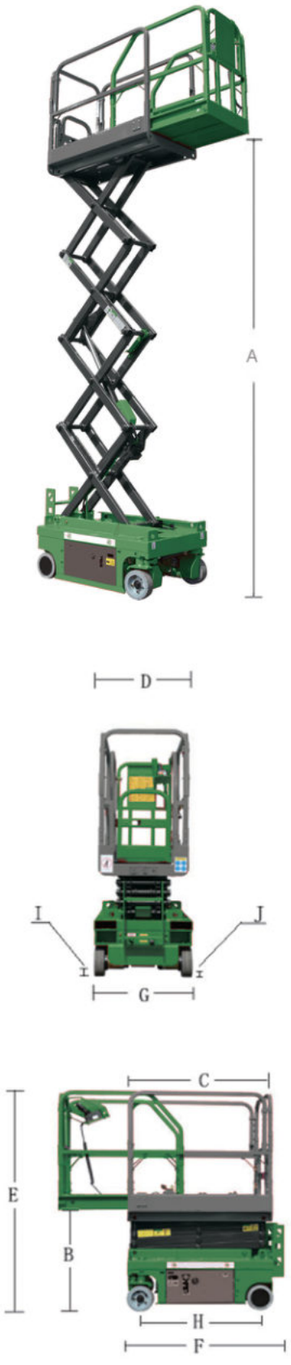

MINI SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- Fault codes are automatically displayed for easy maintenance
- The foldable fence reduces the volume of the whole machine
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- Swivel chassis for easy maintenance
- The pedal extension platform can be quickly rolled out to the operating point



FEATURES

Safety Configuration

Automatic braking system
Emergency descent system
Charging protection system
Oil pipe explosion-proof system
Tilt protection system
Automatic pothole protection
Emergency stop button
Tamper-proof
Platform self-locking door
Foldable fence


Other Configuration

Full Self-propelled
Non-marking tire
4×2 drive
Extended platform
Horn& Buzzer
Standard transport forklift hole
Work schedule
Continuously variable speed

א.מ.ר ייבוא מלגזות בע"מ
A.M.R. Forlift Import Ltd
ירכא איזור תעשייה ת.ד. 530 מיקוד 249670
info@amr-ltd.co.il Tel:+972-00-0000000

DETAILED PARAMETERS OF MINI SCISSOR LIFT SERIES

Model	GTJZ0612HD
Size	
Working Height	7.80m
A-Platform Height-Elevated	5.80m
B-Platform height-Stowed	1.1m
C-Platform Length	2.29m
D-Platform Width	1.15m
Platform Extension	0.9m
E-Overall Height (unfolded quardrail)	2.2m
Overall height (folded guardrail)	1.68m
F-Overall Length	2.48m
G-Overall Width	1.19m
H-Wheelbase	1.89m
I-Ground clearance (Stowed)	0.1m
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	113kg
Platform Capacity	450kg
Max. Number of Workers	7
Driving Speed (Strowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning radius (outside)	2.2m
Turning radius (inside)	0.3m
Lifting speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(drive wheel)	Φ381×127mm
Power	
Battery	4×6V/200ah
Charger	24V/30A
Weight	
Gross	2150kg

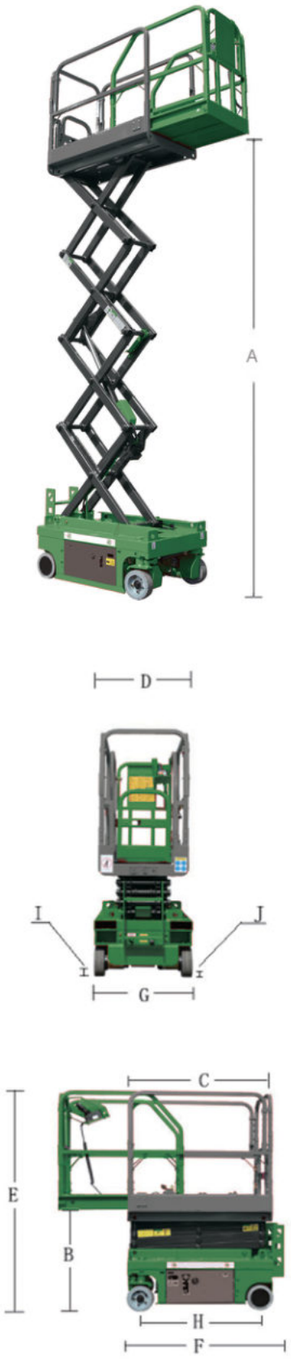

SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- The pedal extension platform can be quickly rolled out to the operating point
- The swivel chassis allows for easy maintenance
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- The foldable fence reduces the volume of the whole machine
- Fault codes are automatically displayed for easy maintenance



FEATURES

Safety Configuration

Automatic braking system
Emergency descent system
Charging protection system
Oil pipe explosion-proof system
Tilt protection system
Automatic pothole protection
Emergency stop button
Tamper-proof
Platform self-locking door
Safe maintenance support rod
Fault diagnosis system
Foldable fence


Other Configuration

Full Self-propelled
Non-marking tire
4×2 drive
Extended platform
Horn& Buzzer
Standard transport forklift hole
Work schedule
Continuously variable speed
Remote car lock
GPS positioning

א.מ.ר ייבוא מלגזות בע"מ
A.M.R. Forlift Import Ltd
ירכא איזור תעשייה ת.ד. 530 מיקוד 249670
info@amr-ltd.co.il Tel:+972-00-0000000

DETAILED PARAMETERS OF SCISSOR LIFT

Model	GTJZ0808HD
Size	
Working Height	9.80m
A-Platform Height-Elevated	7.80m
B-Platform Height-Stowed	1.2m
C-Platform Length	2.26
D-Platform Width	0.84
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.32m
Overall height (folded guardrail)	1.85m
F-Overall Length	2.48
G-Overall Width	0.84
H-Wheelbase	1.89m
I-Ground Clearance (Stowed)	0.1
J-Ground Clearance (Raised)	0.02
Performance	
Capacity of Extension	113kg
Platform Capacity	230kg
Max. Number of Workers	1 person+70kg
Driving Speed (Strowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning Radius (Outside)	3.1m
Turning Radius (Inside)	0m
Lifting Speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(Drive Wheel)	Φ381×127mm
Power	
Battery	4×12V/240ah
Charger	24V/30A
Weight	
Gross	2030kg

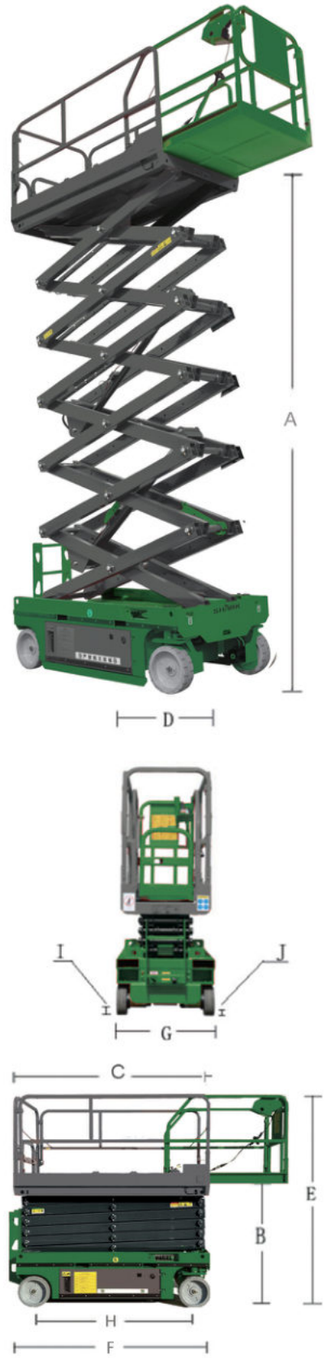

SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- The pedal extension platform can be quickly rolled out to the operating point
- The swivel chassis allows for easy maintenance
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- The foldable fence reduces the volume of the whole machine
- Fault codes are automatically displayed for easy maintenance



FEATURES

Safety Configuration

Automatic braking system
Emergency descent system
Charging protection system
Oil pipe explosion-proof system
Tilt protection system
Automatic pothole protection
Emergency stop button
Tamper-proof
Platform self-locking door
Safe maintenance support rod
Fault diagnosis system
Foldable fence


Other Configuration


Full Self-propelled
Non-marking tire
4×2 drive
Extended platform
Horn& Buzzer
Standard transport forklift hole
Work schedule
Continuously variable speed
Remote car lock
GPS positioning


א.מ.ר ייבוא מלגזות בע"מ
A.M.R. Forlift Import Ltd
ירכא איזור תעשייה ת.ד. 530 מיקוד 249670
info@amr-ltd.co.il Tel:+972-00-0000000

DETAILED PARAMETERS OF SCISSOR LIFT

Model	GTJZ0812HD
Size	
Working Height	9.80m
A-Platform Height-Elevated	7.80m
B-Platform Height-Stowed	1.2m
C-Platform Length	2.29
D-Platform Width	1.12
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.32m
Overall height (folded guardrail)	1.82m
F-Overall Length	2.48
G-Overall Width	1.19
H-Wheelbase	1.89m
I-Ground Clearance (Stowed)	0.1
J-Ground Clearance (Raised)	0.02
Performance	
Capacity of Extension	113kg
Platform Capacity	450kg
Max. Number of Workers	3 Person
Driving Speed (Strowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning Radius (Outside)	2.2m
Turning Radius (Inside)	0m
Lifting Speed	3-5m/min
Gradeability	0.25
Max. Working Angle	2°/3°
Tire(Drive Wheel)	Φ381×127mm
Power	
Battery	4×6V/240ah
Charger	24V/30A
Weight	
Gross	2280kg

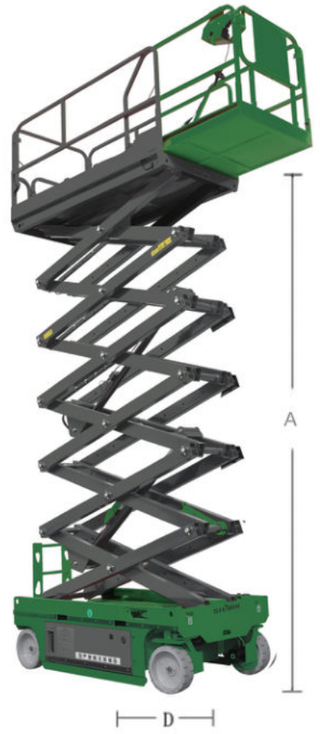





SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- The pedal extension platform can be quickly rolled out to the operating point
- The swivel chassis allows for easy maintenance
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- The foldable fence reduces the volume of the whole machine
- Fault codes are automatically displayed for easy maintenance



FEATURES

Safety Configuration

Automatic braking system
Emergency descent system
Charging protection system
Oil pipe explosion-proof system
Tilt protection system
Automatic pothole protection
Emergency stop button
Tamper-proof
Platform self-locking door
Safe maintenance support rod
Fault diagnosis system
Foldable fence


Other Configuration

Full Self-propelled
Non-marking tire
4×2 drive
Extended platform
Horn& Buzzer
Standard transport forklift hole
Work schedule
Continuously variable speed
Remote car lock
GPS positioning


א.מ.ר ייבוא מלגזות בע"מ
A.M.R. Forlift Import Ltd
ירכא איזור תעשייה ת.ד. 530 מיקוד 249670
info@amr-ltd.co.il Tel:+972-00-0000000

DETAILED PARAMETERS OF SCISSOR LIFT

Model	GTJZ1012HD
Size	
Working Height	11.80m
A-Platform Height-Elevated	9.80m
B-Platform Height-Stowed	1.35m
C-Platform Length	2.29
D-Platform Width	1.12
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.46m
Overall height (folded guardrail)	1.92m
F-Overall Length	2.48
G-Overall Width	1.19
H-Wheelbase	1.89m
I-Ground Clearance (Stowed)	0.1
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	113kg
Platform Capacity	320kg
Max. Number of Workers	2 Person
Driving Speed (Strowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning Radius (Outside)	2.2m
Turning Radius (Inside)	0m
Lifting Speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(Drive Wheel)	Φ381×127mm
Power	
Battery	4×6V/240ah
Charger	24V/30A
Weight	
Gross	2540kg

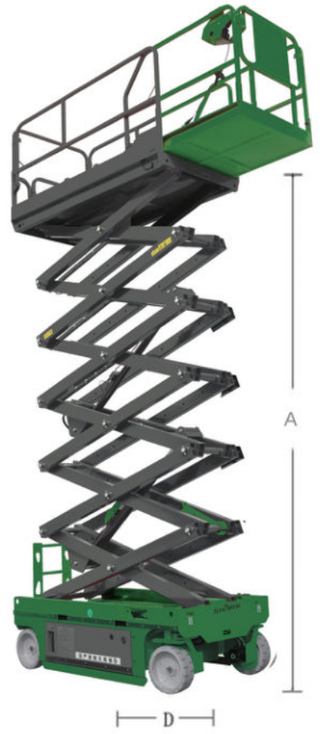





SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- The pedal extension platform can be quickly rolled out to the operating point
- The swivel chassis allows for easy maintenance
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- The foldable fence reduces the volume of the whole machine
- Fault codes are automatically displayed for easy maintenance



FEATURES

Safety Configuration

Automatic braking system
Emergency descent system
Charging protection system
Oil pipe explosion-proof system
Tilt protection system
Automatic pothole protection
Emergency stop button
Tamper-proof
Platform self-locking door
Safe maintenance support rod
Fault diagnosis system
Foldable fence


Other Configuration


Full Self-propelled
Non-marking tire
4×2 drive
Extended platform
Horn& Buzzer
Standard transport forklift hole
Work schedule
Continuously variable speed
Remote car lock
GPS positioning


א.מ.ר ייבוא מלגזות בע"מ
A.M.R. Forlift Import Ltd
ירכא איזור תעשייה ת.ד. 530 מיקוד 249670
info@amr-ltd.co.il Tel:+972-00-0000000

DETAILED PARAMETERS OF SCISSOR LIFT

Model	GTJZ1212HD
Size	
Working Height	13.80m
A-Platform Height-Elevated	11.80m
B-Platform Height-Stowed	1.48m
C-Platform Length	2.29
D-Platform Width	1.12
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.58m
Overall height (folded guardrail)	2.05m
F-Overall Length	2.48
G-Overall Width	1.19
H-Wheelbase	1.89m
I-Ground Clearance (Stowed)	0.1
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	113kg
Platform Capacity	320kg
Max. Number of Workers	2 Person
Driving Speed (Strowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning Radius (Outside)	2.2m
Turning Radius (Inside)	0m
Lifting Speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(Drive Wheel)	Φ381×127mm
Power	
Battery	4×6V/240ah
Charger	24V/30A
Weight	
Gross	2880kg

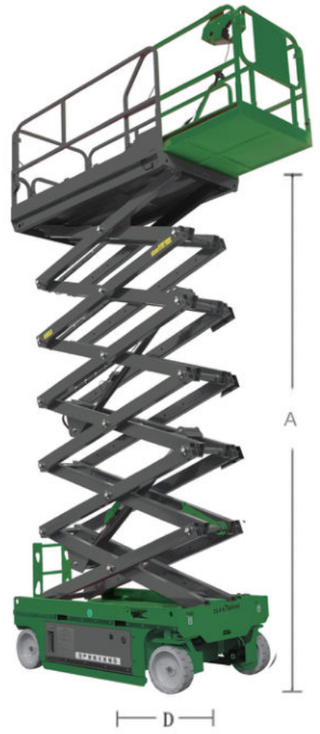





SCISSOR LIFTS SERIES

HIGHLIGHTS

High Performance

- The pedal extension platform can be quickly rolled out to the operating point
- The swivel chassis allows for easy maintenance
- Convenient for working in tight spaces
- 25% climbing ability, able to smoothly climb up the slope
- The foldable fence reduces the volume of the whole machine
- Fault codes are automatically displayed for easy maintenance



FEATURES

Safety Configuration

Automatic braking system
Emergency descent system
Charging protection system
Oil pipe explosion-proof system
Tilt protection system
Automatic pothole protection
Emergency stop button
Tamper-proof
Platform self-locking door
Safe maintenance support rod
Fault diagnosis system
Foldable fence

Other Configuration

Full Self-propelled
Non-marking tire
4×2 drive
Extended platform
Horn& Buzzer
Standard transport forklift hole
Work schedule
Continuously variable speed
Remote car lock
GPS positioning

א.מ.ר ייבוא מלגזות בע"מ
A.M.R. Forlift Import Ltd
ירכא איזור תעשייה ת.ד. 530 מיקוד 249670
info@amr-ltd.co.il Tel:+972-00-0000000

DETAILED PARAMETERS OF SCISSOR LIFT

Model	GTJZ1414HD
Size	
Working Height	15.8m
A-Platform Height-Elevated	13.80m
B-Platform Height-Stowed	1.495m
C-Platform Length	2.64
D-Platform Width	1.13
Platform Extension	0.9m
E-Overall Height (unfolded guardrail)	2.595m
Overall height (folded guardrail)	2.060m
F-Overall Length	2.84
G-Overall Width	1.4m
H-Wheelbase	1.895m
I-Ground Clearance (Stowed)	0.1
J-Ground Clearance (Raised)	0.02m
Performance	
Capacity of Extension	113kg
Platform Capacity	227kg
Max. Number of Workers	1 person+70kg
Driving Speed (Strowed)	3.5km/h
Driving Speed (Raised)	0.8km/h
Turning Radius (Outside)	2.2m
Turning Radius (Inside)	0m
Lifting Speed	3-5m/min
Gradeability	0.25
Max. Working Angle	1.5°/3°
Tire(Drive Wheel)	Φ381×127mm
Power	
Battery	4×12V/240ah
Charger	24V/30A
Weight	
Gross	3400kg

